




PRE-ASSEMBLED STAINLESS STEEL MANIFOLDS

917CDEB Pre-assembled manifold with flow meters, air vent valve and drain cock – Automatic flow control

OVERALL DIMENSIONS

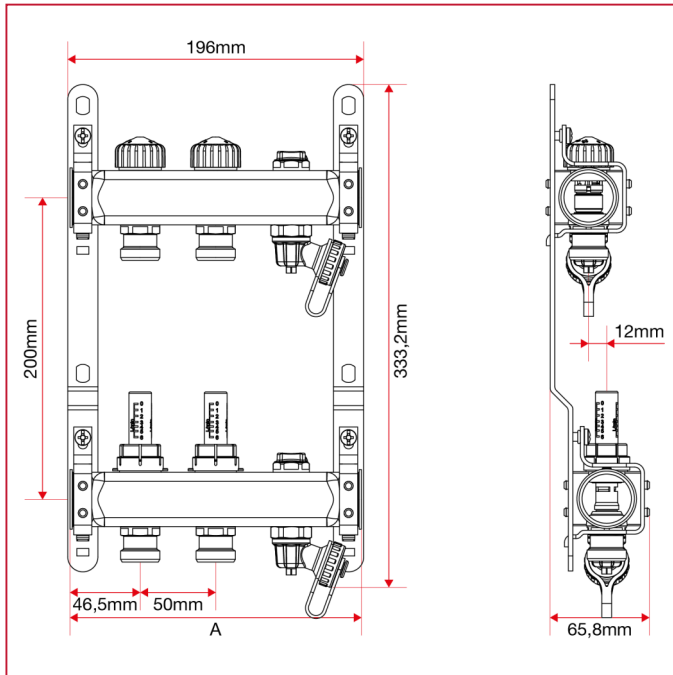

917CDE

	1"x3/4"x 2	1"x3/4"x 3	1"x3/4"x 4	1"x3/4"x 5	1"x3/4"x 6	1"x3/4"x 7	1"x3/4"x 8	1"x3/4"x 9	1"x3/4"x 10	1"x3/4"x 11	1"x3/4"x 12
A	193	243	293	343	393	443	493	543	593	643	693
Kg/cm ² bar	6	6	6	6	6	6	6	6	6	6	6
LBS - psi	87	87	87	87	87	87	87	87	87	87	87