



THERMOSTATIC CONTROL HEADS


891R Thermostatic control head with oil-filled element

INSTRUCTIONS

Thermostatic control head - Angle valve 1/2"
Thermostatic control head - Straight valve 1/2"
acc. to EN 215 part 1

Rated pressure: PN10
Control range: 8 28°C
Standard temperature numeral 3: 20°C
Temperature to next numeral: 3K (°C)
Total shut-off position: >
Hysteresis 0,8 K (°C)
Influence of heating agent: 0,8 K

APPROX. SETTING POSITION:




VALVE INSTALLATION:

If a fixed sensor is used the lower part of the valve should be installed horizontally.
- Note direction of flow -

THERMOSTATIC CONTROL HEAD INSTALLATION:

The thermostatic control head is not screwed on until all construction work has been completed.
Thermostatic control head with fixed sensor must be installed horizontally.

- 1 - Open thermostatic control head by turning anticlockwise.
- 2 - Place thermostatic control head, with marking at top, on valve and tighten the union nut. Position 3 corresponds to approx 20°C.

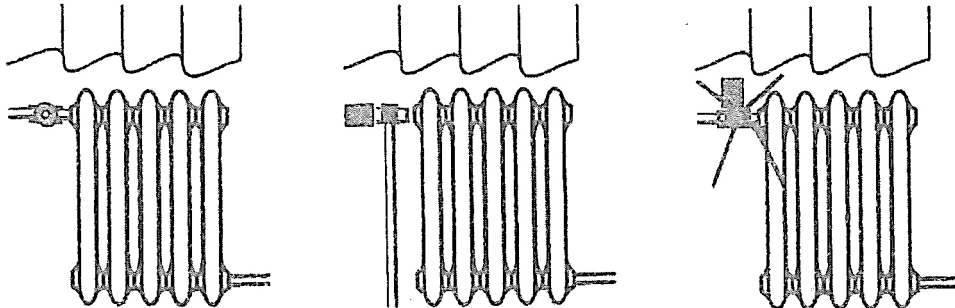


TEMPERATURE BLOCKING PROCEDURE:

Setting position 0-5:



THERMOSTATIC CONTROL HEADS

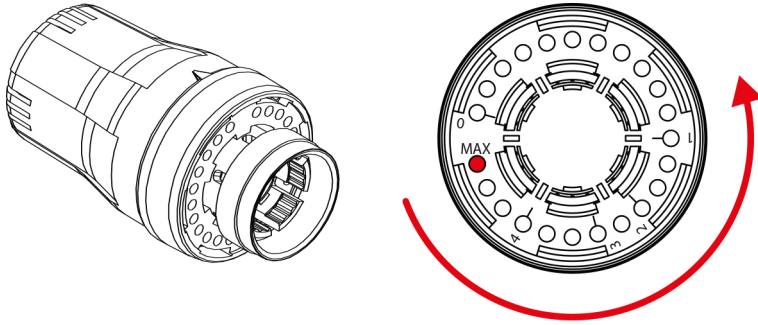

The MAX temperature can be limited by setting the temperature limiting pin from MAX toward 1.

TEMPERATURE LIMITATION at MAX:

Accessories to be supplied: 1 pin mounted at position MAX

- Extract the pin from its position MAX
- Turn the head to the position antifreeze
- Insert the pin into the back hole marked with the appropriate number of temperature limitation (0-4).